


Linksys PAP2 Phone Adapter

Quick Start Guide

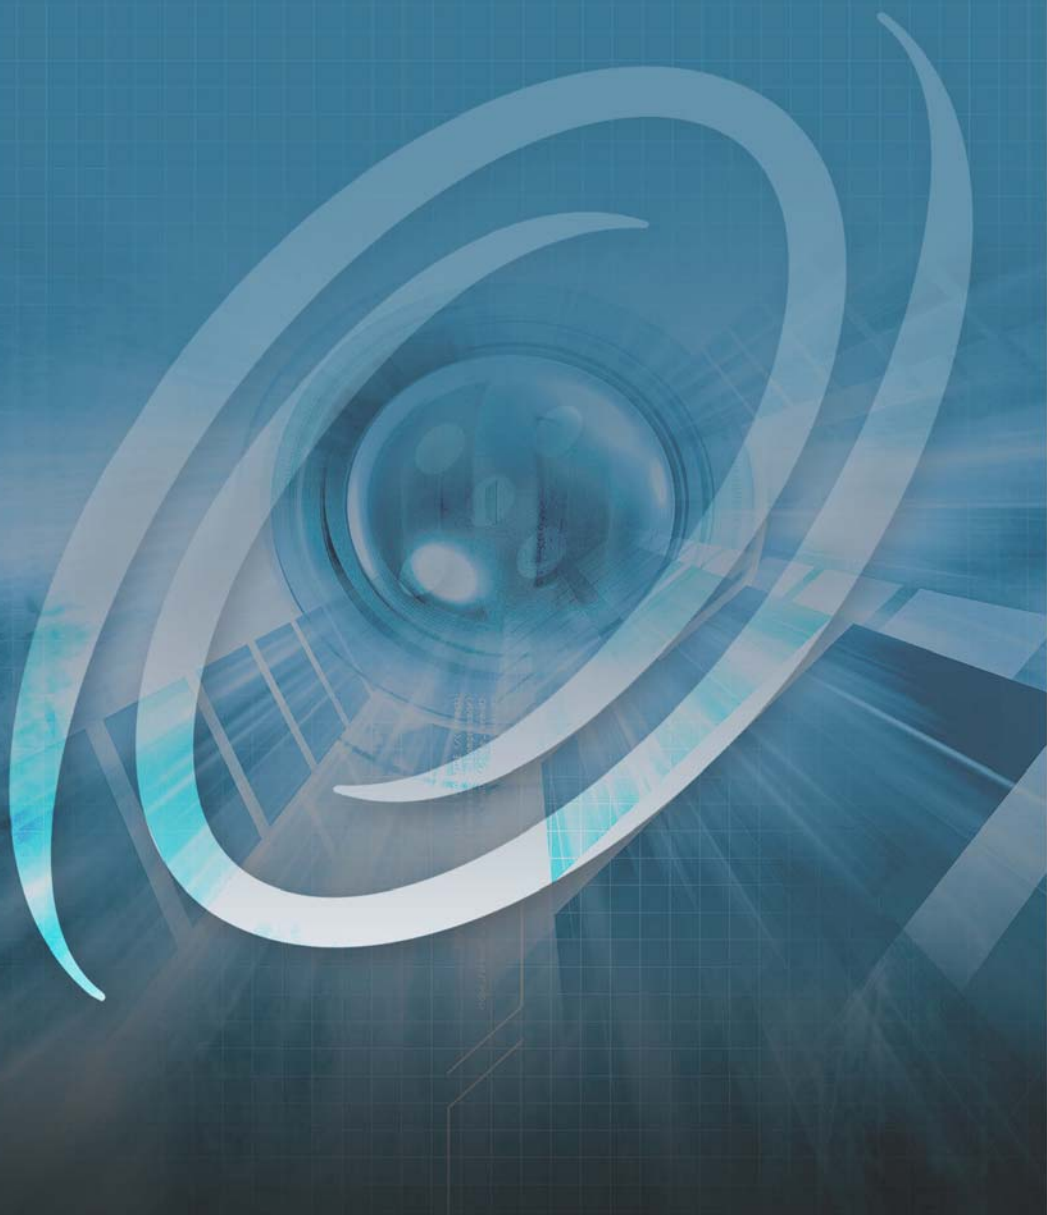

IMPORTANT INFORMATION - PLEASE READ

Warning: E911 service may be limited or not available.

- Voice service, including E911 service, DOES NOT function during an electrical power or broadband provider outage.
- If you relocate your phone, you MUST provide your new location. Delays may occur in updating your location.
- E911 service may not be available from all areas. Please contact your service provider.

Warning: E911 service may be limited or not available.

- Voice service, including E911 service, DOES NOT function during an electrical power or broadband provider outage.
- If you relocate your phone, you MUST provide your new location. Delays may occur in updating your location.
- E911 service may not be available from all areas. Please contact your service provider.

These decals contain important information regarding 911 services for your voice services. We request that you place these decals in a visible location on your telephone as a reminder.

IMPORTANT NOTICE CONCERNING EMERGENCY 911 SERVICES

Your service provider, not the manufacturer of the equipment, is responsible for the provision of phone services through this equipment. Any services provided through this equipment are not intended to replace or be a substitute for primary line voice services or Plain Old Telephone Service ("POTS") and are not meant to provide Automatic Number Identification or Automatic Location Information capabilities associated with emergency 911 or E911 services. Check with your service provider to determine whether emergency 911 or E911 services are offered as part of your plan. Even where emergency 911 services are offered as part of your plan, the service will not work properly if you move the equipment to a different location from your registered location. You should also be aware that phone services (including 911) will not work in the event of either a failure of your internet service or in the event of a power outage. You must inform any other persons who may use this equipment of the limitations of 911 and E911 emergency services. It is strongly recommended that you always maintain an alternate means of reaching a 911 operator in case of an emergency. The manufacturer, distributor and service provider shall not be liable for, and expressly disclaim, any direct or indirect damages, claims, losses, expenses, liabilities, actions, risks, or harms arising out of or related to the services provided through this equipment, including without limitation, emergency 911 or E911 services.

All Rights Reserved. Copyright © 2006

The use, disclosure, modification, transfer, or transmittal of this work for any purpose, in any form, or by any means, without the written permission of the copyright holder, is strictly forbidden.

Disclaimer

The content of this manual is subject to change without notice and should not be construed as a commitment by the manufacturer, distributor, or service provider.

This manual is furnished for informational use only and the manufacturer, distributor, or service provider assumes no responsibility for any errors or inaccuracies that may appear herein.

Configuring the Linksys PAP2

This section provides step-by-step instructions for configuring the PAP2 device and setting up the IP address of your computer.



NOTE: You will need to use a PC that has an Internet browser and a network card installed.

1. From a phone connected to the PAP2, dial **** (four stars) followed by **110#**.
IMPORTANT: *Make note of the IP address the device announces.*
2. From a PC connected to the same network as the PAP2, open a web browser and enter the IP address in the **Address** field. (e.g., `http://<ipaddress>`)
3. Click the **Admin Login** link.
4. Click the **Advanced View** link.
5. Click the **Line 1** tab at the top of the page, and then configure the settings as follows:

⇒ **NAT Settings**

- ◆ NAT Keep Alive Enable = **no**

⇒ **Proxy and Registration**

- ◆ Proxy = **byod1.net2phone.com**
- ◆ Register = **no**
- ◆ Use Outbound Proxy = **no**
- ◆ Use OB Proxy In Dialog = **no**
- ◆ Make Call Without Reg = **yes**
- ◆ Ans Call Without Reg = **yes**
- ◆ DNS SRV Auto Prefix = **no**

⇒ **Subscriber Information**

- ◆ Display Name = **NO_DID1**
- ◆ User ID = <your Net2Phone account number>
- ◆ Password = <your Net2Phone PIN>

⇒ **Audio Configuration**

- ◆ Preferred Codec = **G723**
- ◆ Use Pref Codec Only = **no**
- ◆ G729a Enable = **no**
- ◆ G723 Enable = **yes**
- ◆ G726-16 Enable = **no**
- ◆ G726-24 Enable = **no**
- ◆ G726-32 Enable = **no**
- ◆ G726-40 Enable = **no**
- ◆ FAX Codec Symmetric = **yes**
- ◆ DTMF Tx Method = **AVT**
- ◆ Hook Flash Tx Method = **None**
- ◆ Release Unused Codec = **yes**

Voice

Phone Adapter with 2 Ports for Voice-Over-IP

PAP2

Info System SIP Provisioning Regional Line 1 Line 2 User 1 User 2

Advanced View (switch to basic view)

User Login

Streaming Audio Server (SAS)

Line Enable:

SAS Enable:

SAS Inbound RTP Sink:

SAS DLO Refresh Intvl:

NAT Settings

NAT Mapping Enable:

NAT Keep Alive Msg:

NAT Keep Alive Enable:

NAT Keep Alive Dest:

Call Feature Settings

Blind Attn-Xfer Enable:

Xfer When Hangup Conf:

Conference Bridge Ports:

MOH Server:

Conference Bridge URL:

Proxy and Registration

Proxy:

Outbound Proxy:

Register:

Register Expires:

Use DNS SRV:

Proxy Fallback Intvl:

Voice Mail Server:

Use Outbound Proxy:

Use OB Proxy In Dialog:

Make Call Without Reg:

Ans Call Without Reg:

DNS SRV Auto Prefic:

Proxy Redundancy Method:

Subscriber Information

Display Name:

Password:

Auth ID:

Mini Certificate:

SRTP Private Key:

User ID:

Use Auth ID:

Audio Configuration

Preferred Codec:

Use Pref Codec Only:

G729a Enable:

G723 Enable:

G726-16 Enable:

G726-24 Enable:

G726-32 Enable:

G726-40 Enable:

FAX Codec Symmetric:

DTMF Tx Method:

Hook Flash Tx Method:

Release Unused Codec:

Silence Supp Enable:

Silence Threshold:

Echo Canc Enable:

Echo Canc Adapt Enable:

Echo Supp Enable:

FAX CED Detect Enable:

FAX CNG Detect Enable:

FAX Passthru Codec:

FAX Passthru Method:

FAX Process NSE:

FAX Disable ECAN:

Dial Plan

Dial Plan:

Enable IP Dialing:

Emergency Number:

FXS Port Polarity Configuration

Idle Polarity:

Callee Conn Polarity:

Caller Conn Polarity:

Save Settings

Cancel Settings

